


Item #	Part Number	Description
	MP340-F	MP340-MF34
1	MP340-ITEM5-A	Hex370 Seal
2	MP340-ITEM3-B	Back Head Hex370-B
3	MP340-ITEM26-A	Plug-A
4	MP340-ITEM25-A	Plug Seal
5	MP340-ITEM28-A	Breakout Washer Seal
6	MP340-ITEM14-A	Break Out Washer
7	MP340-ITEM7-A	Backhead Middle Seal
8	MP340-ITEM30-A	Check Valve Seal
9	MP340-ITEM18-A	Check Valve-A
10	MP340-ITEM19-A	Check Valve Spring-A
11	MP340-ITEM20-B	Distributor-B
12	MP340-ITEM29-A	Distributor Seal
13	MP340-ITEM21-A	Distributor Retainer
14	MP340-ITEM6-A	Backhead Bottom Seal
15	MP340-ITEM2.1-C	Hammer Casing Top-C
16	MP340-ITEM2.3-A	Frame Seal
17	MP340-ITEM24-B	Piston-B
18	MP340-ITEM2.2-B	Hammer Casing Bottom-B
19	MP340-ITEM16-A	Aligner Retaining Ring-A
20	MP340-ITEM17-A	Aligner-A
21	MP340-ITEM27-A	Aligner Seal
22	MP340-ITEM11-B	Retaining Rings-B
23	MP340-ITEM13-A	Break Out Washer
24	MP340-ITEM15-A	Breakout Washer Seal
25	MP340-ITEM8-A	Chuck-A
26	MP340-ITEM12-A	Chuck Bush-A

Specifications	Metric	Imperial
Hammer Outside Diameter	750 mm	29.6"
Shoulder to Shoulder	2,336 mm	92"
Drill Bit Shank Type		MF34
Minimum Bit Size	850 mm	33.5"
Hammer Weight (Less Bit)	5,807 kg	12,802 lbs
Drill Bit Weight		2,000 kg
Piston Weight	1,050 kg	2,315 lbs
Backhead Stand Off		0 mm
Make up Torque		32,540 Nm
Wear Sleeve Reverse Limit		Non-Reversible

Stated drill bit weight is indicative only. Actual drill bit weight will vary based on drill bit head size and carbide configuration.

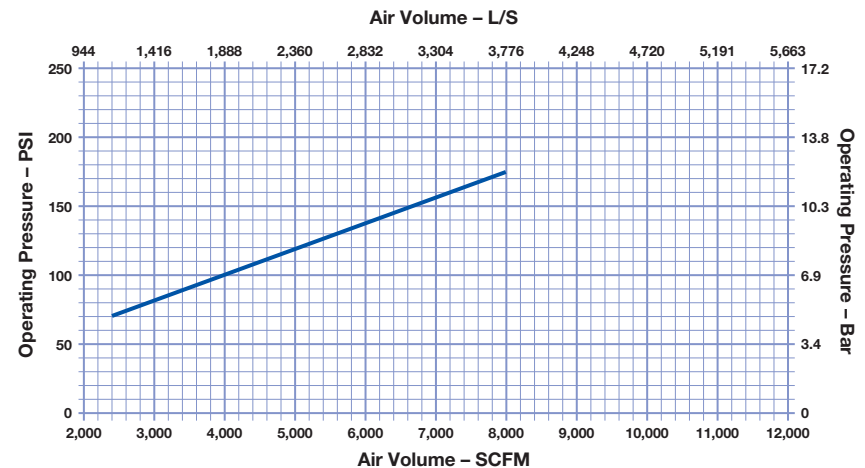

Disclaimer:
 1. Air consumption values are based on a combination of simulation data and real-world testing.
 2. All air charts are based on normal temperature and atmospheric pressure: 20°C and 101.325 kPa (68°F and 14.696 psi).
 3. Air density decreases with altitude, which will increase air consumption. Please consult the Mincon technical implementation team for exact air package requirements that take account for altitude and ground conditions.